

# SL-360 Size: AA

› Standard use and stand-by


### Performance Data

(Typical values for batteries stored at +25 °C for one year)


|                                   |                          |
|-----------------------------------|--------------------------|
| System                            | Lithium Thionyl Chloride |
| Nominal voltage                   | 3.6 V                    |
| Nominal capacity                  | 2.4 Ah                   |
| Nominal current                   | 2 mA                     |
| Max. continuous discharge current | 20 mA                    |
| Anode surface area                | 14 cm <sup>2</sup>       |
| Lithium content                   | 0.65 g                   |
| Weight                            | 18 g                     |
| Volume                            | 8 cm <sup>3</sup>        |
| Temperature range                 | -55 °C ... +85 °C        |




### Typical Discharge Curves at +25 °C

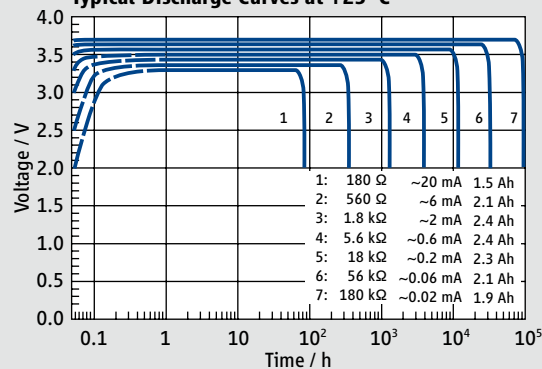


### Available Capacity

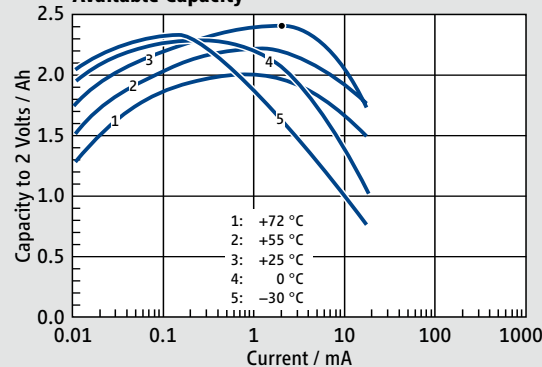


### Operating Voltage

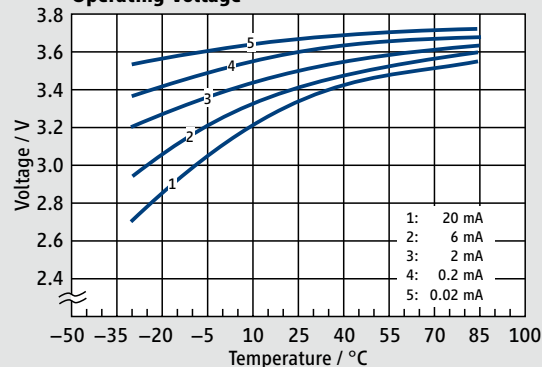


### SL-360/S

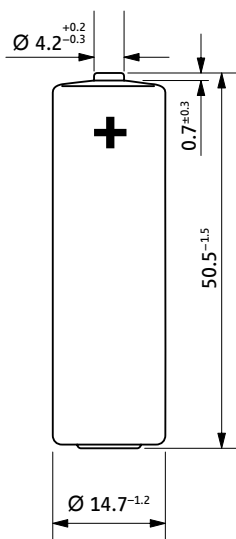


### SL-360/T




### SL-360/P

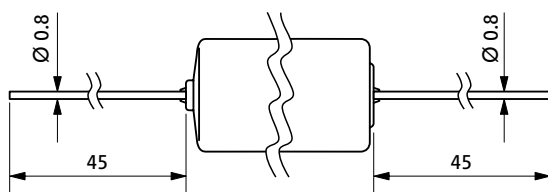

### SL-360/PR



### SL-360/PT



### Available Terminations

### Catalogue No.

|           |                |               |
|-----------|----------------|---------------|
| SL-360/S  | Standard       | 11 1 03601 00 |
| SL-360/T  | Tags           | 11 1 03602 00 |
| SL-360/P  | Pins           | 11 1 03603 00 |
| SL-360/PR | Pins radial    | 11 1 03606 00 |
| SL-360/PT | Polarized tags | 11 1 03608 00 |

**WARNING:**  
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.