

# HOA2005

## Transmissive Optoschmitt Sensor

### FEATURES

- Direct TTL interface
- Buffer logic
- Side mount package
- Ambient light and dust protective filter
- Accurate position sensing
- 0.010 in.(0.25mm) aperture windows
- 0.125 in.(3.18 mm) slot width
- 24.0 in.(610 mm) min. 26 AWG UL 1429 wire leads

### DESCRIPTION

The HOA2005 consists of an infrared emitting diode facing an Optoschmitt detector encased in a black thermoplastic housing. The photodetector consists of a photodiode, amplifier, voltage regulator, Schmitt trigger and an NPN output transistor with 10 k $\Omega$  (nominal) pull-up resistor. The buffer logic provides a high output when the optical path is clear, and a low output when the path is blocked. The side mounting package is useful in applications in which the interruptive element is parallel to the mounting plane. Both emitter and detector have a 0.010 in.(.25 mm) x .060 in.(1.52 mm) vertical aperture. This feature is ideal for use in applications in which maximum position resolution is desired.

All devices employ a built-in strain relief for maximum wire attachment strength. The sensor housing contains IR transmissive optical windows. This arrangement provides excellent protection against ambient light while eliminating aperture openings which could be clogged by airborne contaminants. The HOA2005 series employs plastic molded components. For additional component information see SEP8506, and SDP8600.

Housing material is polycarbonate. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

Wire color and functions are:


Red - IRED Anode  
Black - IRED Cathode  
Green - Detector Ground  
White - Detector Vcc  
Blue - Detector Output



INFRA-90.TIF

### OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals  $\pm 0.005(0.12)$   
2 plc decimals  $\pm 0.020(0.51)$

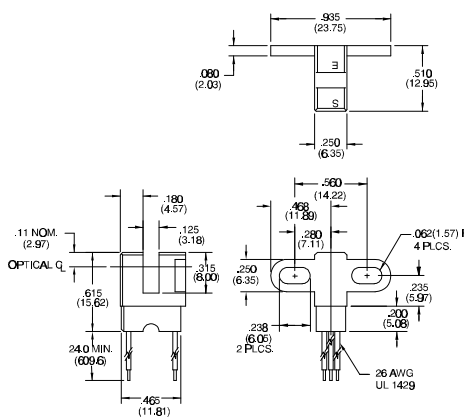

DIM\_063.cdr

## Transmissive Optoschmitt Sensor

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
<b>IR EMITTER</b>						
Forward Voltage	V <sub>F</sub>			1.6	V	I <sub>F</sub> =20 mA
Reverse Leakage Current	I <sub>R</sub>			10	μA	V <sub>R</sub> =3 V
<b>DETECTOR</b>						
Operating Supply Voltage	V <sub>CC</sub>	4.5		12	V	
Low Level Supply Current	I <sub>CC L</sub>	4.0		12	mA	V <sub>CC</sub> =5 V
		5.0		15		V <sub>CC</sub> =12 V
High Level Supply Current	I <sub>CC H</sub>	2.0		10	mA	V <sub>CC</sub> =5 V
		3.0		12		V <sub>CC</sub> =12 V
Low Level Output Voltage	V <sub>OL</sub>			0.4	V	I <sub>OL</sub> =12.8 mA, I <sub>F</sub> =0 mA
High Level Output Voltage	V <sub>OH</sub>	2.4			V	I <sub>OH</sub> =0, I <sub>F</sub> =20 mA
Hysteresis <sup>(2)</sup>	HYST		10		%	
Propagation Delay, Low-High, High-Low	t <sub>PLH</sub> , t <sub>PHL</sub>		5		μs	V <sub>CC</sub> =5 V, I <sub>F</sub> =20 mA
Rise Time	t <sub>r</sub>		60		ns	R <sub>L</sub> =390 Ω, C <sub>L</sub> =50 pF
Fall Time	t <sub>f</sub>		6		ns	R <sub>L</sub> =390 Ω, C <sub>L</sub> =50 pF
<b>COUPLED CHARACTERISTICS</b>						
IR LED Trigger Current HOA2005-001	I <sub>FT</sub>			20 20	mA	V <sub>CC</sub> =5 V

2. Hysteresis is defined as the difference between the operating and release threshold intensities, expressed as a percentage of the operate threshold intensity.

[illegible]

# HOA2005

## Transmissive Optoschmitt Sensor

SWITCHING WAVEFORM

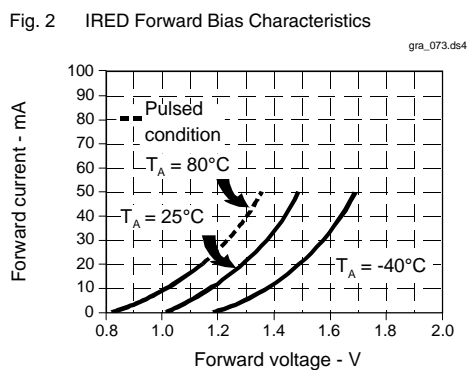
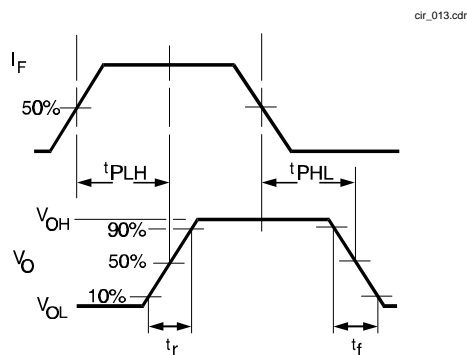


Fig. 1 SWITCHING WAVEFORM


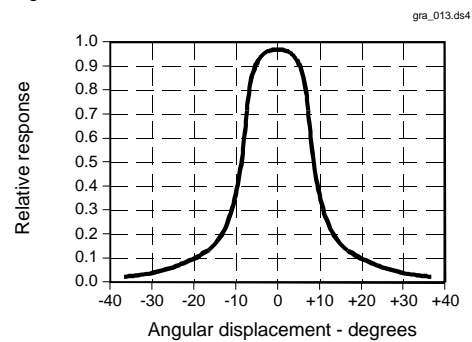


Fig. 3 IRED Trigger Current vs Temperature

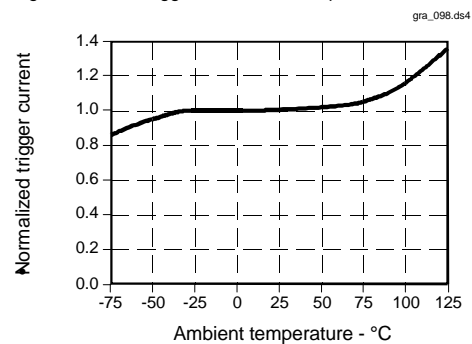

# HOA2005

Transmissive Optoschmitt Sensor

---

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

## Honeywell

375



Elblinger Elektronik GmbH  
Lange Wanne 25  
38259 Salzgitter

Telefon 05341/8212-1  
Fax 05341/821299

e-mail [mail@elblinger-elektronik.de](mailto:mail@elblinger-elektronik.de)  
Internet [www.elblinger-elektronik.de](http://www.elblinger-elektronik.de)