


HOA0825

Transmissive Sensor

FEATURES

- Phototransistor output
- Four mounting configurations
- 0.165 in.(4.2 mm) slot width

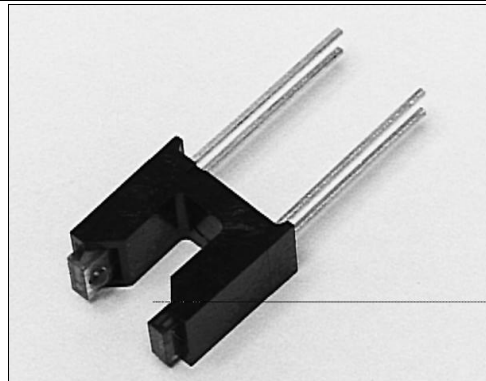

INFRA-52.TIF

DESCRIPTION


The HOA0825 series consists of an infrared emitting diode facing an NPN silicon phototransistor encased in a black thermoplastic housing. A slot in the housing between emitter and detector provides the means for mechanically interrupting the emitter beam. The phototransistor switching takes place whenever an opaque object passes through the slot between emitter and detector. The HOA0825 series employs plastic molded components. For additional component information see SEP8506 and SDP8406.

Housing material is polycarbonate. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

OUTLINE DIMENSIONS in inches (mm)


Tolerance 3 plc decimals ±0.010(0.25)
2 plc decimals ±0.020(0.51)

HOA0825-003

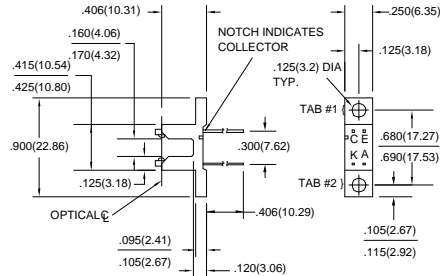


DIM_040.d54

HOA0825-001




DIM_40b.d54

HOA0825-002



HOA0825-004



HOA0825

Transmissive Sensor

ELECTRICAL CHARACTERISTICS (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
IR EMITTER						
Forward Voltage	V_F		1.6		V	$I_F=20\text{ mA}$
Reverse Leakage Current	I_R		10		μA	$V_R=3\text{ V}$
DETECTOR						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30			V	$I_C=100\ \mu\text{A}$
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$	5.0			V	$I_E=100\ \mu\text{A}$
Collector Dark Current	I_{CEO}		100		nA	$V_{CE}=10\text{ V}, I_F=0$
COUPLED CHARACTERISTICS						
On-State Collector Current HOA0825-001, -002, -003, -004	$I_{C(ON)}$	0.5			mA	$V_{CE}=0.5\text{ V}$ $I_F=20\text{ mA}$
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$		0.4		V	$I_F=20\text{ mA}$ $I_C=250\ \mu\text{A}$
Rise And Fall Time	t_r, t_f		15		μs	$V_{CC}=5\text{ V}, I_C=1\text{ mA}$ $R_L=1000\ \Omega$

ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C


IR EMITTER

Power Dissipation	100 mW ⁽¹⁾
Reverse Voltage	3 V
Continuous Forward Current	50 mA

DETECTOR

Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5 V
Power Dissipation	100 mW ⁽¹⁾
Collector DC Current	30 mA

SCHEMATIC

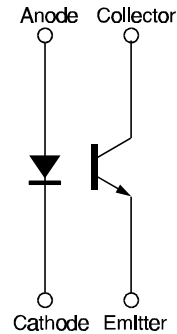

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

HOA0825

Transmissive Sensor

Fig. 1 IRED Forward Bias Characteristics

gra_092.ds4

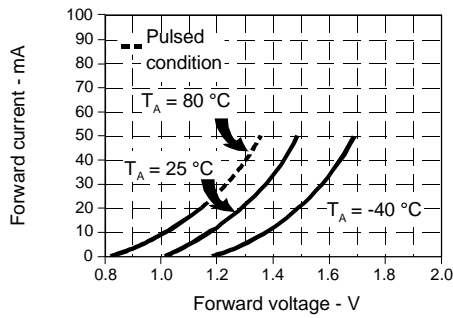


Fig. 2 Non-Saturated Switching Time vs Load Resistance

gra_093.ds4

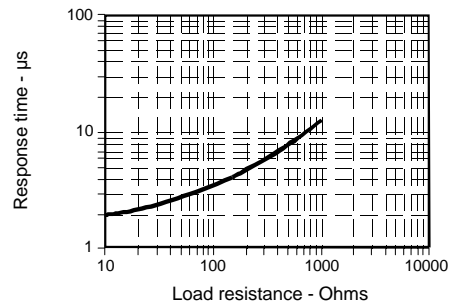



Fig. 3 Dark Current vs Temperature

gra_301.cdr



Fig. 4 Collector Current vs Ambient Temperature

gra_095.ds4

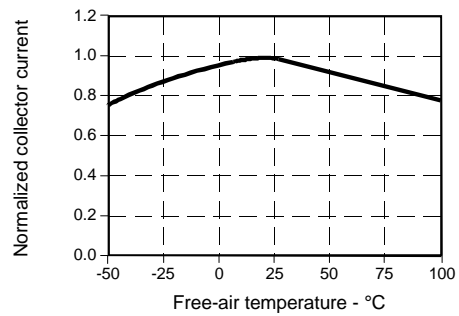

All Performance Curves Show Typical Values

HOA0825
Transmissive Sensor

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

273



Elblinger Elektronik GmbH
Lange Wanne 25
38259 Salzgitter

Telefon 05341/8212-1
Fax 05341/821299

e-mail mail@elblinger-elektronik.de
Internet www.elblinger-elektronik.de