


Product Datasheet

Alkaline

LR6 Powerline



LR6AD

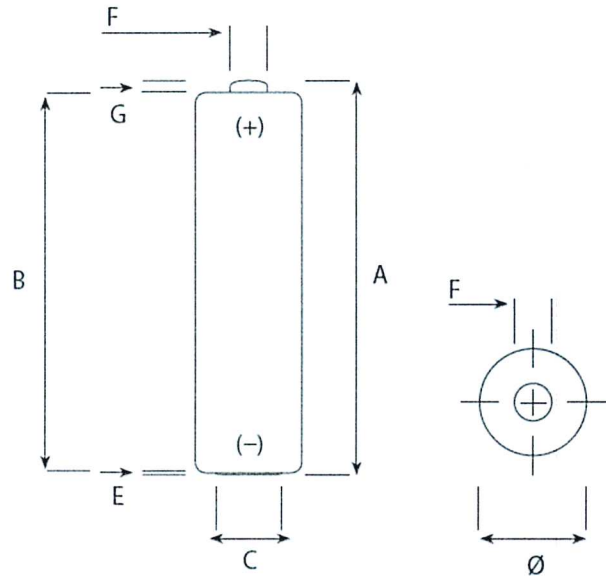

| IEC Dimensions (mm) | | |
|---------------------|---------|---------|
| Dimension | Maximum | Minimum |
| A | 50,5 | — |
| B | — | 49,5 |
| C | — | 7,0 |
| E | 0,5 | — |
| F | 5,5 | — |
| G | — | 1,0 |
| Ø | 14,5 | 13,7 |


Specifications

| | |
|------------------------------------|---|
| Name | LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC |
| Made in | Belgium |
| Type | Alkaline Foil |
| Nominal Voltage | 1,5 Volt |
| Electrolyte | Potassium Hydroxide |
| Average weight | 23 g |
| Storage temperature range | +10°C (50°F) ~ +25°C (77°F) |
| Operating temperature range | -20°C (-4°F) ~ +55°C (131°F) |
| Average Impedance | +/- 105 m-Ohm @ 1kHz fresh |
| Heavy metals | No added mercury (Hg), Cadmium (Cd) or Lead (Pb) |
| Compliant to | IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel |
| Recommended cut off voltage | 0,8V per cell (0,9V per cell for multi series usage) |


Typical discharge values

LR6AD


Radio/Clock
4h/d 43 ohm end 0,9V

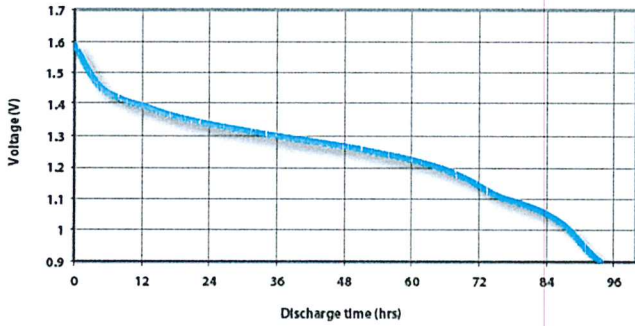

Digital audio
1h/d 100 mA end 0,9V

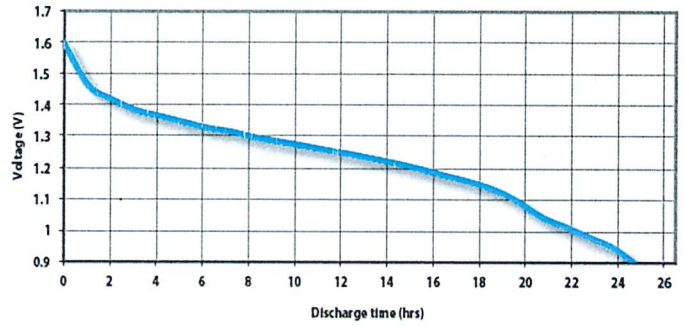


Motor/toy
1h/d 3,9 ohm end 0,8V

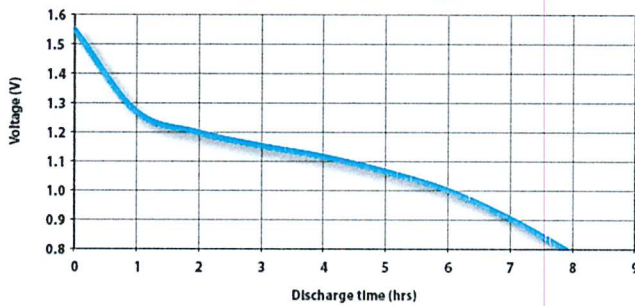


Remote control
15s/m 8h/d 24 ohm end 1,0V




Photo flash
10s/m 1h/d 1000 mA end 0,9V

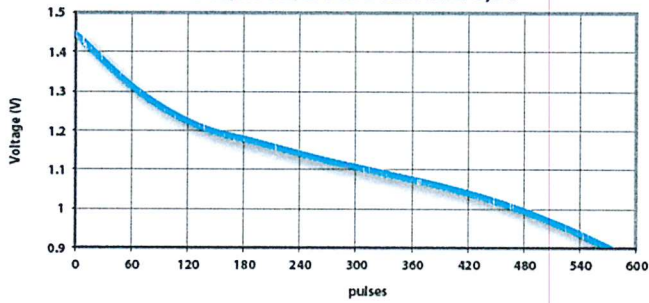

CD/Electronic games
1h/d 250 mA end 0,9V

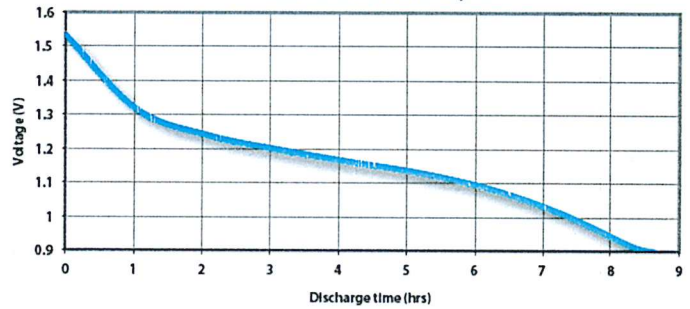

DSC
10x(2s 1,5W/28s 0,65W) 5m,55m off,
24h/d end 1,05V

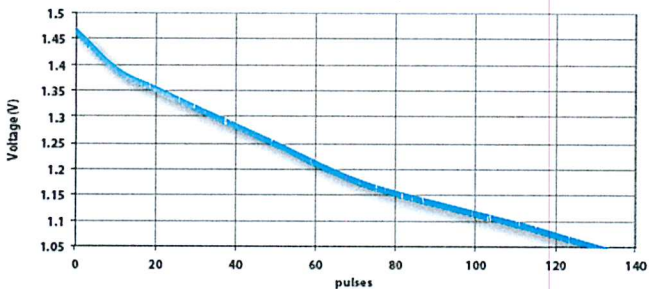

Portable lighting
4m/h 8h/d 3,3 ohm end 0,9V

